

Spin-on Dopant Si-2000R

Elements of Interest Si, O	Key Element atoms/cm³ Si, 6E+20	Key Element in Film silicon
Viscosity 0.90 +/- 0.15 cps	Thickness Coats 2000 Å (200 nm) at 4000 rpm Refractive Index 1.4161	Shelf Life 20°C 3 months 4°C 9 months
Dielectric Constant (k) 3.0		

Benefits

- Simple method for silicon dopant layers
- Can be used as a source of silicon for doping purposes
- Lower Maintenance and Cost of Ownership
- High purity materials
- Uniform Coatings
- Basic composition that other elements can be easily added to
- Stable Processing Independent of Flow Rates

Typical Application

This is a silicon-doped glass that is used as a silicon-doping source. When baked at 250°C it gives a low-density film that continues to become increasingly dense as bakes continue to 600°C or higher. We recommend baking at least as high as the highest temperature in subsequent processing.

The silica formed films have high melting points. Other elements can be added to lower the melting point if that is desired. Sometimes elements are added to change the refractive index or other properties.

Packaging

- 240ml
- 500ml
- 1 l
- 2.5 l
- 4 l


Alternative Products

Sn-365

Alternate Elements

- Ge
- Tin
- Blends of two or more elements
- Other elements available for compound semiconductor use

Spin-on Dopant Si-2000R

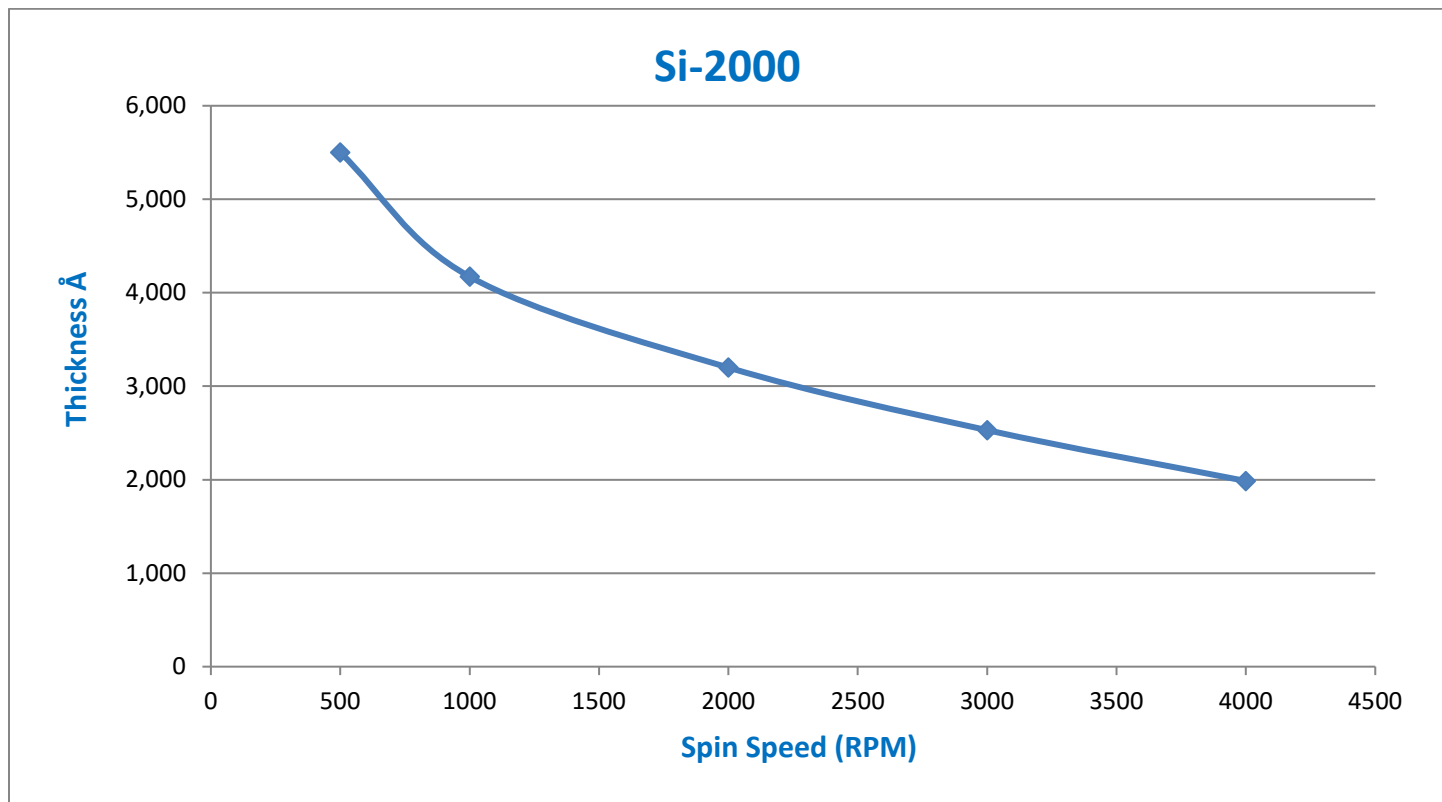

Although all statement and information presented in this document are believed to be accurate and reliable, they are presented without warranty or guarantee of any kind, expressed or implied. Information presented does not relieve the end user from carrying out their own tests to determine suitability for use in their application. User assumes all risk and liability for use product or information and results obtained. Suggestions for use of material and processes are made without representation or warranty that any such is free from patent infringement and are not recommendations for patent infringement. Please see SDS for information regarding health and safety of material use