

Spin-on Glass Na-910

| | | |
|---|---|--|
| Elements of Interest Na | Key Element atoms/cm³ Na, 10E+21 | Key Element % in Film Sodium |
| Viscosity, n (635nm) 0.9 cps, 1.5 | Thickness Coats 150 nm at 3000 rpm | Shelf Life 20°C 3 months 4°C 9 months |

Benefits

- Heavy Na doping level
- Uniform Coatings
- High purity materials
- Lower melting point than silica alone
- Stable processing independent of flow rates
- Available with impurity specification of less than 1 ppm or less than 50 ppb.

Typical Application

This is a standard silicate Sodium doped glass. It begins curing at about 200°C to give a less dense but solid film. It continues to become increasingly stronger as bakes continue to 650°C or higher. We recommend baking at the highest temperature the material will see in any post processing if the material is to remain with the part. For doping applications the glass is often removed after drive in.

Packaging


- 240ml
- 500ml
- 1 l
- 2.5 l
- 4 l

Alternative Products

Na-221, Na-528

Elements Available to Add

- Blends of two or more elements
- Other elements available for compound semiconductor use

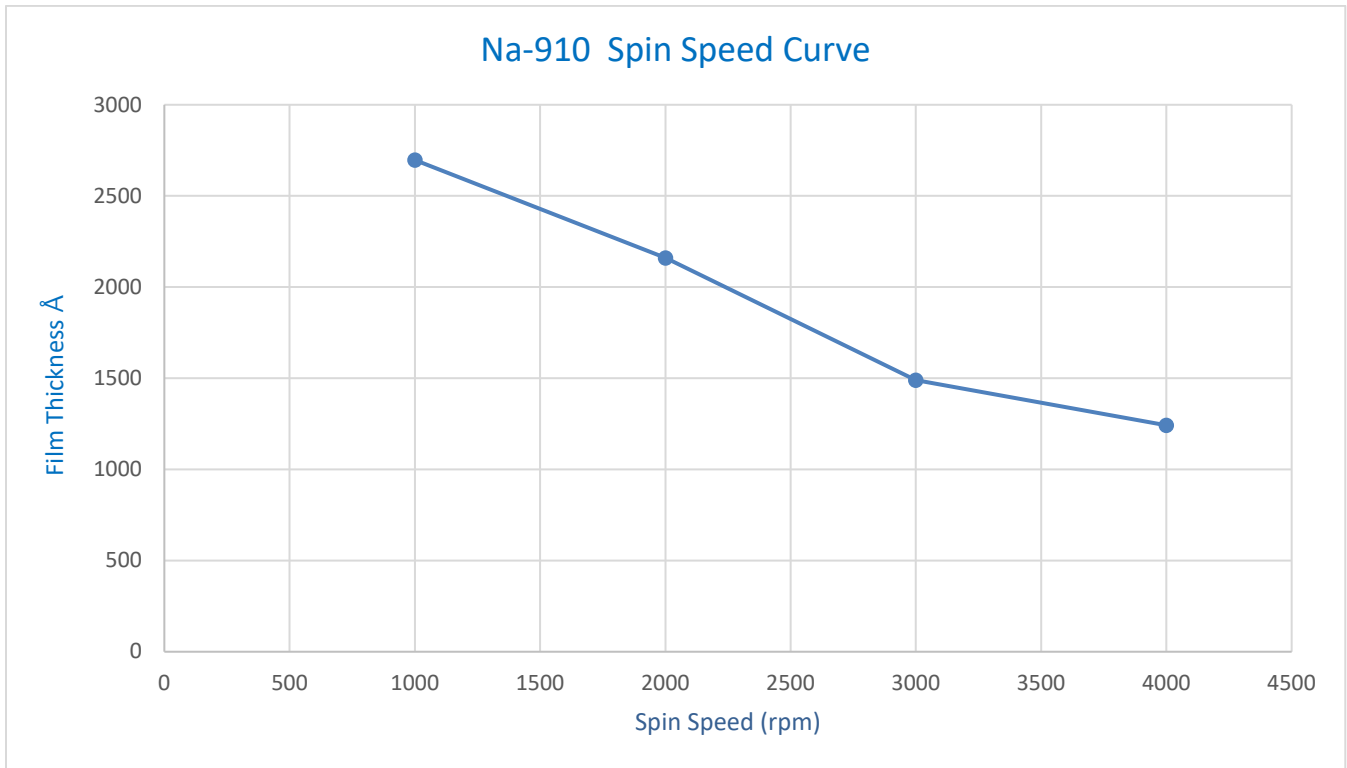

Although all statements and information presented in this document are believed to be accurate and reliable, they are presented without warranty or guarantee of any kind, express or implied. Information presented does not relieve the end user from carrying out their own tests to determine suitability for use in their application. User assumes all risk and liability for product use or information and results obtained. Suggestions for use of material and processes are made without representation or warranty that any such is free from patent infringement and are not recommendations for patent infringement. Please see MSDS for information regarding health and safety of material use.

DESERT SILICON, INC.
PHONE: (623) 872-8659

**10720 W. INDIAN SCHOOL ROAD,
STE. 19, #126**
EMAIL: INFO@DESERTSILICON.COM

PHOENIX, ARIZONA 85037
**WEBSITE:
WWW.DESERTSILICON.COM**